

## LEADER\_60

HEAVY DUTY HYDRAULIC BRIQUETTING PRESS 60mm-70kg/h



**SALVAMAC SELECTION**

**PRICE LIST 2021 eng**

**SALVAMAC SP. Z O.O.**  
ul. Owsiana 9,  
62-070 Zakrzewo  
POLAND

**FACTORY**  
ul. Modrzewiowa 18,  
62-081 Przeźmierowo  
POLAND

VAT no: PL7773261350  
Tel. +48 61 670 8737  
info@salvamac.com

[www.salvamac.com](http://www.salvamac.com)



## **LEADER\_60**

for selected dry wood shavings and sawdust

### **MAIN FEATURES**

- Batching worm screw for homogeneous feeding
- Immediate on/off, no start-up time
- High quality components
- 100% designed and made in Italy
- Low spare parts wear
- Automatic operations
- Powder coated frame
- Compact size and easy to use



**SALVAMAC SP. Z O.O.**  
ul. Owsiana 9,  
62-070 Zakrzewo  
POLAND

**FACTORY**  
ul. Modrzewiowa 18,  
62-081 Przeźmierowo  
POLAND

VAT no: PL7773261350  
Tel. +48 61 670 8737  
info@salvamac.com

[www.salvamac.com](http://www.salvamac.com)




## Operating principle

The briquetting press is fed by a feeding screw with a conical profile which receives the material from the silo and puts the product directly into the compressions chamber of the briquetting press.

Then the piston pushes the product through the extruder held firmly by the vice piston. Thanks to the friction created by pressure of the vice piston, the material to be processed is compressed and the briquette is produced.

## Raw material specification

Description of the material to process	Selected shavings and sawdust	
Maximum water content of product to be pressed	% Rh	≤ 15
Maximum ash and silica content	%	≤ 1
Material particle size	mm	≤ 8-10 mm x th. 3 mm
Bulk weigh of material	kg/h	120 – 150

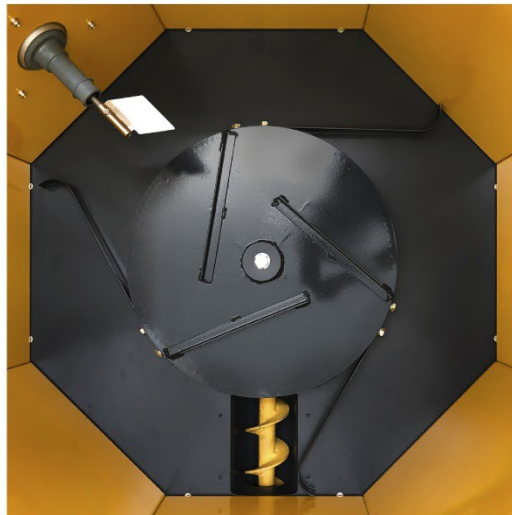

### Constructional features

- ✓ Load-bearing base frame for loading bin Ø900 H900 mm
- ✓ Oil tank for hydraulic control unit
- ✓ Hopper with loading worm screw
- ✓ Mechanical press with die head located beside the loading bin
- ✓ Hydraulic unit comprising solenoid valves, gear pumps, plates and hydraulic circuit tubes.
- ✓ PLC control panel. Power supply of machine with three-phase line 380V-50Hz.

Loading bin motor	kW 1,5 + 0,75
Press auxiliary motor	kW 7,5
Hourly throughput	kg/h 50 – 70
Briquette diameter (Ø)	mm 60
Length of the briquettes	mm from 30 to 50
Dimensions	Mm 1250 -1940- 1470
Weight	Kg 1270

**LEADER\_60 - PRICE MACHINE UNIT:**

**Euro:**

**SALVAMAC SP. Z O.O.**  
 ul. Owsiana 9,  
 62-070 Zakrzewo  
 POLAND

**FACTORY**  
 ul. Modrzewiowa 18,  
 62-081 Przeźmierowo  
 POLAND

VAT no: PL7773261350  
 Tel. +48 61 670 8737  
 info@salvamac.com

[www.salvamac.com](http://www.salvamac.com)



## OPTIONAL LEADER\_60

Load level indicator for automatic operation Euro:

Inspection door on silo Euro:

Oil level electric indicator Euro:

Oil temperature electric indicator Euro:

## SPECIAL OPTIONAL LEADER\_60

Oil cooling system Euro:

Extruder cooling unit Euro:

## SELLING CONDITIONS

**Validity of this offer:** 30 days.

**Prices in Euro**, EX-WORKS Italy.

**Delivery:** to be agreed.

**Payment:** 25% at order confirmation, 75% at communication of goods ready and before the departure.

**Unload and movement to the destination:** excluded.

**Packing:** extendable polyethylene protection, pallet: included, excluded: cases and crates or other particular packing if necessary: at cost.

**Guarantee:** 12 months/1700 working hours. Traveling, board and lodging expenses: excluded.

**Connections:** excluded.

**Installation and assembly:** excluded.

Machine with "CE" certification, if in line with other machineries the certification of the whole line must be done by the buyer.

Goods free our factory, loaded on the vehicle; insurance, fixing and obligatory covering: excluded.

Custom expenses, taxes and other costs not foreseen excluded.

With using book in English

**Other regulations** as our general sales terms.

Best Regards

**Christian Salvador / SALVAMAC**



*Possible pictures present in the offer must be considered purely as an indication.  
Salvamac sp. z o. o. reserves the right to make improving changes without notice.*

**SALVAMAC SP. Z O.O.**

ul. Owsiana 9,  
62-070 Zakrzewo  
POLAND

**FACTORY**

ul. Modrzewiowa 18,  
62-081 Przeźmierowo  
POLAND

VAT no: PL7773261350  
Tel. +48 61 670 8737  
info@salvamac.com

[www.salvamac.com](http://www.salvamac.com)

